

# LED Flood Light

FLL12-120 and FLL12W-120  
120VAC 50/60Hz operation

Project:	
Catalog#:	
Approved by:	
Date:	

## Features

- Energy Saving
- Comparable to 100W halogen while using less energy
- 50,000 hour LED lifespan for maintenance-free operation
- Heat dissipating fins optimizes thermal management

## Housing

- Low-copper, aluminum die-cast housing and lens frame
- Heat dissipating fins for optimized thermal management.
- Durable polyester powder coat finish
- Bronze or white housing

## Lens/Refractor

- Tempered glass lens, thermal shock and impact resistant.

## LEDs/LED Driver

- 12W
- Color temp: Neutral White (4100K)
- CRI: 80
- 1,220 Lumen Output
- 50,000 Hour Life
- Input voltage: 120VAC 50/60 Hz
- Knurled notches securely retain rotated position even in demanding environments.

## Mounting

- 1/2" NPS aluminum die-cast swivel arm fits to standard junction box (not included).
- Side screw on arm knuckles allows for optics aiming.

## Certifications

- UL/CUL Listed, suitable for Wet Locations

## Warranty


- 2-Year Warranty

## Applications


Ideal for building facades, security, accenting architecture, signs and displays.



## Photometrics

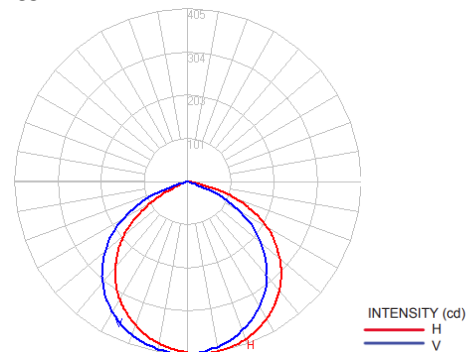

## Dimensions

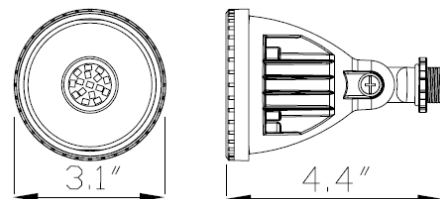

Ordering Information						
UPC Code	Model #	Input Wattage	Lumens	Driver	Voltage	Housing Color
09502	<b>FLL12-120</b>	12 Watt	1,220 lm	LED	120VAC 50/60 Hz	Bronze
09503	<b>FLL12W-120</b>					White

## Sample Ordering Information

**FLL12-120**  
12W, 1,220 Lumens  
4100K  
120VAC  
Bronze Housing

